

**CROSSMAN**<sup>®</sup>  
P R O F E S S I O N A L





**SCREWDRIVER**  
**FASTENER DRIVE TOOL**  
**HEX KEY WRENCH**



*Built For The Pro's*<sup>®</sup>

©2005





● **Comfortable Crown**

● **Cushion Grip Handle**

● **Patented Hexagonal Cross Section Handle**

● **Correct & Stable Control Drive Device**



● **Special Alloy Steel**

● **Non-Slip Device**






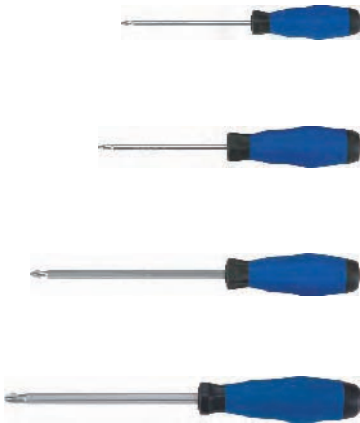
**Cushion Grip Screwdrivers**

Description	Pt. Size	Size		 kgs
<b>Non-Slip Power Screwdrivers</b>				
46-001	Slotted 3.2mm	3.2mm x 75mm L (3")	12/480	0.4/18.5
46-002	Slotted 3.2mm	3.2mm x 100mm L (4")	12/480	0.5/19.0
46-003	Slotted 4.0mm	4.0mm x 100mm L (4")	12/240	0.5/11.0
46-004	Slotted 4.0mm	4.0mm x 150mm L (6")	12/240	0.6/12.0
46-005	Slotted 4.0mm	4.0mm x 200mm L (8")	12/240	0.6/13.2
46-031	Slotted 5.0mm	5.0mm x 75mm L (3")	24/192	1.7/14.5
46-006	Slotted 5.0mm	5.0mm x 100mm L (4")	24/192	1.8/15.1
46-007	Slotted 5.0mm	5.0mm x 150mm L (6")	24/192	2.0/16.5
46-008	Slotted 5.0mm	5.0mm x 200mm L (8")	12/120	1.1/12.6
46-009	Slotted 6.0mm	6.0mm x 100mm L (4")	24/192	2.1/17.7
46-010	Slotted 6.0mm	6.0mm x 150mm L (6")	24/192	2.5/21.0
46-011	Slotted 6.0mm	6.0mm x 200mm L (8")	12/120	1.4/14.6
46-012	Slotted 8.0mm	8.0mm x 150mm L (6")	12/120	2.0/20.6
46-013	Slotted 8.0mm	8.0mm x 200mm L (8")	12/120	2.2/23.2

 Slotted



 Phillips



<b>Non-Slip Power Screwdrivers</b>				
46-015	Phillips No.0	3.2mm x 75mm L (3")	12/480	0.4/18.5
46-016	Phillips No.0	3.2mm x 100mm L (4")	12/480	0.5/19.0
46-017	Phillips No.0	4.0mm x 100mm L (4")	12/240	0.5/11.0
46-018	Phillips No.0	4.0mm x 150mm L (6")	12/240	0.6/12.0
46-019	Phillips No.0	4.0mm x 200mm L (8")	12/240	0.6/13.2
46-032	Phillips No.1	5.0mm x 75mm L (3")	24/192	1.7/14.5
46-020	Phillips No.1	5.0mm x 100mm L (4")	24/192	1.8/15.1
46-021	Phillips No.1	5.0mm x 150mm L (6")	24/192	2.0/16.5
46-022	Phillips No.1	5.0mm x 200mm L (8")	12/120	1.1/12.6
46-023	Phillips No.2	6.0mm x 100mm L (4")	24/192	2.1/17.7
46-024	Phillips No.2	6.0mm x 150mm L (6")	24/192	2.5/21.0
46-025	Phillips No.2	6.0mm x 200mm L (8")	12/120	1.4/14.6
46-026	Phillips No.3	8.0mm x 150mm L (6")	12/120	2.0/20.6
46-027	Phillips No.3	8.0mm x 200mm L (8")	12/120	2.2/23.2





⊖ Slotted



⊕ Phillips



**Cushion Grip Screwdrivers**

Description	Pt. Size	Size		kgs
<b>Impact Hex Bolster Screwdriver</b>				
46-101	Slotted 5.0mm	5.0mm x 75mm L (3")	12/240	0.9/17.0
46-102	Slotted 5.0mm	5.0mm x 100mm L (4")	12/240	0.9/17.0
46-105	Slotted 6.0mm	6.0mm x 100mm L (4")	12/240	1.1/22.0
46-106	Slotted 6.0mm	6.0mm x 150mm L (6")	12/240	1.2/25.5
46-110	Slotted 8.0mm	8.0mm x 150mm L (6")	12/120	2.0/21.0
46-111	Slotted 8.0mm	8.0mm x 200mm L (8")	12/120	2.2/23.0
<b>Impact Hex Bolster Screwdriver</b>				
46-121	Phillips No.1	5.0mm x 75mm L (3")	12/240	0.9/17.0
46-122	Phillips No.1	5.0mm x 100mm L (4")	12/240	0.9/17.0
46-125	Phillips No.2	6.0mm x 100mm L (4")	12/240	1.1/22.0
46-126	Phillips No.2	6.0mm x 150mm L (6")	12/240	1.2/25.5
46-130	Phillips No.3	8.0mm x 150mm L (6")	12/120	2.0/21.0
46-131	Phillips No.3	8.0mm x 200mm L (8")	12/120	2.2/23.0

**Line Color Screwdrivers**



<b>Mechanical Screwdrivers</b>				
46-501	Slotted 3.2mm	3.2mm x 50mm L (2")	12/720	0.2/13.0
46-502	Slotted 3.2mm	3.2mm x 75mm L (3")	12/720	0.2/13.5
46-503	Slotted 3.2mm	3.2mm x 100mm L (4")	12/720	0.2/14.7
46-504	Slotted 4.0mm	4.0mm x 75mm L (3")	12/720	0.3/15.5
46-575	Slotted 4.0mm	4.0mm x 100mm L (4")	12/720	0.3/17.0
46-506	Slotted 4.0mm	4.0mm x 150mm L (6")	12/720	0.3/20.5
46-507	Slotted 4.0mm	4.0mm x 200mm L (8")	24/480	0.8/16.5
46-508	Slotted 4.0mm	4.0mm x 250mm L (10")	12/240	0.5/10.0
46-509	Slotted 4.0mm	4.0mm x 300mm L (12")	12/240	0.5/11.0
46-511	Slotted 5.0mm	5.0mm x 75mm L (3")	12/240	0.6/12.5
46-512	Slotted 5.0mm	5.0mm x 100mm L (4")	12/240	0.6/13.5
46-513	Slotted 5.0mm	5.0mm x 150mm L (6")	12/240	0.7/15.4
46-514	Slotted 5.0mm	5.0mm x 200mm L (8")	12/240	0.8/17.1
46-515	Slotted 5.0mm	5.0mm x 250mm L (10")	12/240	0.9/19.0
46-516	Slotted 5.0mm	5.0mm x 300mm L (12")	12/240	1.0/20.5
46-521	Slotted 6.0mm	6.0mm x 38mm L (1.5")	12/240	0.5/11.1
46-522	Slotted 6.0mm	6.0mm x 100mm L (4")	12/240	0.9/18.1
46-523	Slotted 6.0mm	6.0mm x 125mm L (5")	12/240	0.9/19.0
46-524	Slotted 6.0mm	6.0mm x 150mm L (6")	12/240	1.0/20.5
46-525	Slotted 6.0mm	6.0mm x 200mm L (8")	12/120	1.1/12.2
46-526	Slotted 6.0mm	6.0mm x 250mm L (10")	12/120	1.3/13.5
46-527	Slotted 6.0mm	6.0mm x 300mm L (12")	12/120	1.4/14.5
46-528	Slotted 8.0mm	8.0mm x 150mm L (6")	12/120	1.8/18.0
46-529	Slotted 8.0mm	8.0mm x 200mm L (8")	12/120	1.8/19.5
46-530	Slotted 8.0mm	8.0mm x 250mm L (10")	12/120	2.2/22.0
46-531	Slotted 8.0mm	8.0mm x 300mm L (12")	12/120	2.4/24.0



⊖ Slotted



Line Color Screwdrivers

Description	Pt. Size	Size		 kgs
<b>Mechanical Screwdrivers</b>				
46-541	Phillips No. 0	3.2mm x 50mm L (2")	12/720	0.2/13.0
46-542	Phillips No. 0	3.2mm x 75mm L (3")	12/720	0.2/13.5
46-543	Phillips No. 0	3.2mm x 100mm L (4")	12/720	0.2/14.7
46-544	Phillips No. 0	4.0mm x 75mm L (3")	12/720	0.3/15.5
46-545	Phillips No. 0	4.0mm x 100mm L (4")	12/720	0.3/17.0
46-546	Phillips No. 0	4.0mm x 150mm L (6")	12/720	0.3/20.5
46-547	Phillips No. 0	4.0mm x 200mm L (8")	24/480	0.8/16.5
46-548	Phillips No. 0	4.0mm x 250mm L (10")	12/240	0.5/10.0
46-549	Phillips No. 0	4.0mm x 300mm L (12")	12/240	0.5/11.0
46-551	Phillips No. 1	5.0mm x 75mm L (3")	12/240	0.6/12.5
46-552	Phillips No. 1	5.0mm x 100mm L (4")	12/240	0.6/13.5
46-553	Phillips No. 1	5.0mm x 150mm L (6")	12/240	0.7/15.4
46-554	Phillips No. 1	5.0mm x 200mm L (8")	12/240	0.8/17.1
46-555	Phillips No. 1	5.0mm x 250mm L (10")	12/240	0.9/19.0
46-556	Phillips No. 1	5.0mm x 300mm L (12")	12/240	1.0/20.5
46-561	Phillips No. 2	6.0mm x 38mm L (1.5")	12/240	0.5/11.1
46-562	Phillips No. 2	6.0mm x 100mm L (4")	12/240	0.9/18.1
46-563	Phillips No. 2	6.0mm x 125mm L (5")	12/240	0.9/19.0
46-564	Phillips No. 2	6.0mm x 150mm L (6")	12/240	1.0/20.5
46-565	Phillips No. 2	6.0mm x 200mm L (8")	12/120	1.1/12.2
46-566	Phillips No. 2	6.0mm x 250mm L (10")	12/120	1.3/13.5
46-567	Phillips No. 2	6.0mm x 300mm L (12")	12/120	1.4/14.5
46-568	Phillips No. 3	8.0mm x 150mm L (6")	12/120	1.8/18.0
46-569	Phillips No. 3	8.0mm x 200mm L (8")	12/120	1.8/19.5
46-570	Phillips No. 3	8.0mm x 250mm L (10")	12/120	2.2/22.0
46-571	Phillips No. 3	8.0mm x 300mm L (12")	12/120	2.4/24.0

 Phillips






**TORX® Screwdrivers**

46-581	TORX® T5	3.2mm x 75mm L (3")	24/720	0.2/13.5
46-582	TORX® T6	3.2mm x 75mm L (3")	24/720	0.2/13.5
46-583	TORX® T7	3.2mm x 75mm L (3")	24/720	0.2/13.5
46-584	TORX® T8	3.2mm x 75mm L (3")	24/720	0.2/13.5
46-585	TORX® T9	3.2mm x 75mm L (3")	24/720	0.2/13.5
46-586	TORX® T10	4.0mm x 75mm L (3")	24/720	0.5/15.5
46-587	TORX® T15	4.0mm x 75mm L (3")	24/720	0.5/15.5
46-588	TORX® T20	4.0mm x 75mm L (3")	24/720	0.5/15.5
46-589	TORX® T25	5.0mm x 100mm L (4")	12/240	0.6/13.5
46-590	TORX® T27	5.0mm x 100mm L (4")	12/240	0.6/13.5
46-591	TORX® T30	6.0mm x 100mm L (4")	12/240	0.6/13.5

 TORX®



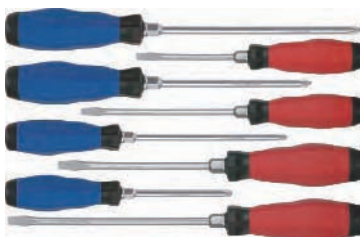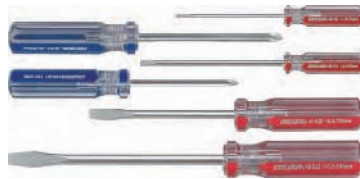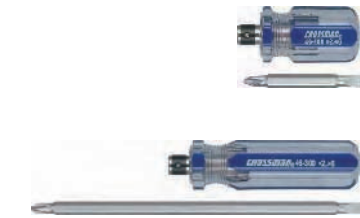

## Ratchet Screwdrivers

Description	Pt. Size	Size			kg
<b>Ratchet Screwdriver Handle</b>					
46-600		1"	6/120	1.0/21.0	
46-601		2"	6/120	1.1/22.0	
46-602		3"	6/120	1.2/24.0	

## Flexible Ratchet Screwdriver Handle

46-603		1"	6/120	1.2/25.0	
--------	--	----	-------	----------	--

## Magnetic Bit Holder

46-500		4"	12/192	1.2/21.0	
--------	--	----	--------	----------	--

## Line Color Screwdriver Sets

### 2-Way Stubby Screwdriver Set

46-100	⊕ No.2 x ⊖ 6mm	6.35mm x 36mm L (1.4" L)	10/200	1.2/24.0	
--------	----------------	--------------------------	--------	----------	--

### 2-Way Screwdriver Set

46-200	⊕ No.2 x ⊖ 6mm	6.35mm x 100mm L (4" L)	6/120	0.8/17.0	
46-300	⊕ No.2 x ⊖ 6mm	6.35mm x 150mm L (6" L)	6/120	0.9/18.0	
46-400	⊕ No.2 x ⊖ 6mm	6.35mm x 200mm L (8" L)	6/120	0.9/19.0	

### 6Pcs. Mechanical Screwdriver Set

46-903			6/48	1.5/13.0	
--------	--	--	------	----------	--

#### ⊖ Slotted :

3.2mm x 75mm L, 4.0mm x 100mm L, 6.0mm x 100mm L, 8.0mm x 150mm L.

#### ⊕ Phillips :

5.0mm x 75mm L, 6.0mm x 100mm L.

## Cushion Grip Screwdriver Sets

### 4-Way Screwdriver Set

46-505	⊕ No.1 x ⊖ 5mm	6.35mm x 150mm L (6" L)	6/120	1.0/21.0	
	⊕ No.2 x ⊖ 6mm	6.35mm x 150mm L (6" L)			

### 8Pcs. Cushion Grip Non-Slip Power Screwdriver Set

46-900			1/24	0.8/19.0	
--------	--	--	------	----------	--

#### ⊖ Slotted :

3.2mm x 75mm L, 5.0mm x 100mm L, 6.0mm x 150mm L, 8.0mm x 150mm L.

#### ⊕ Phillips :

3.2mm x 75mm L, 5.0mm x 100mm L, 6.0mm x 150mm L, 8.0mm x 150mm L.

### 8Pcs. Cushion Grip Impact Hex Bolster Screwdriver Set

46-901			1/24	1.1/27.5	
--------	--	--	------	----------	--

#### ⊖ Slotted :



6.0mm x 100mm L, 6.0mm x 150mm L, 8.0mm x 150mm L, 8.0mm x 200mm L.

#### ⊕ Phillips :

6.0mm x 100mm L, 6.0mm x 150mm L, 8.0mm x 150mm L, 8.0mm x 200mm L.

**Built For The Pro's®**

# CROSSMAN® Fastener Drive System

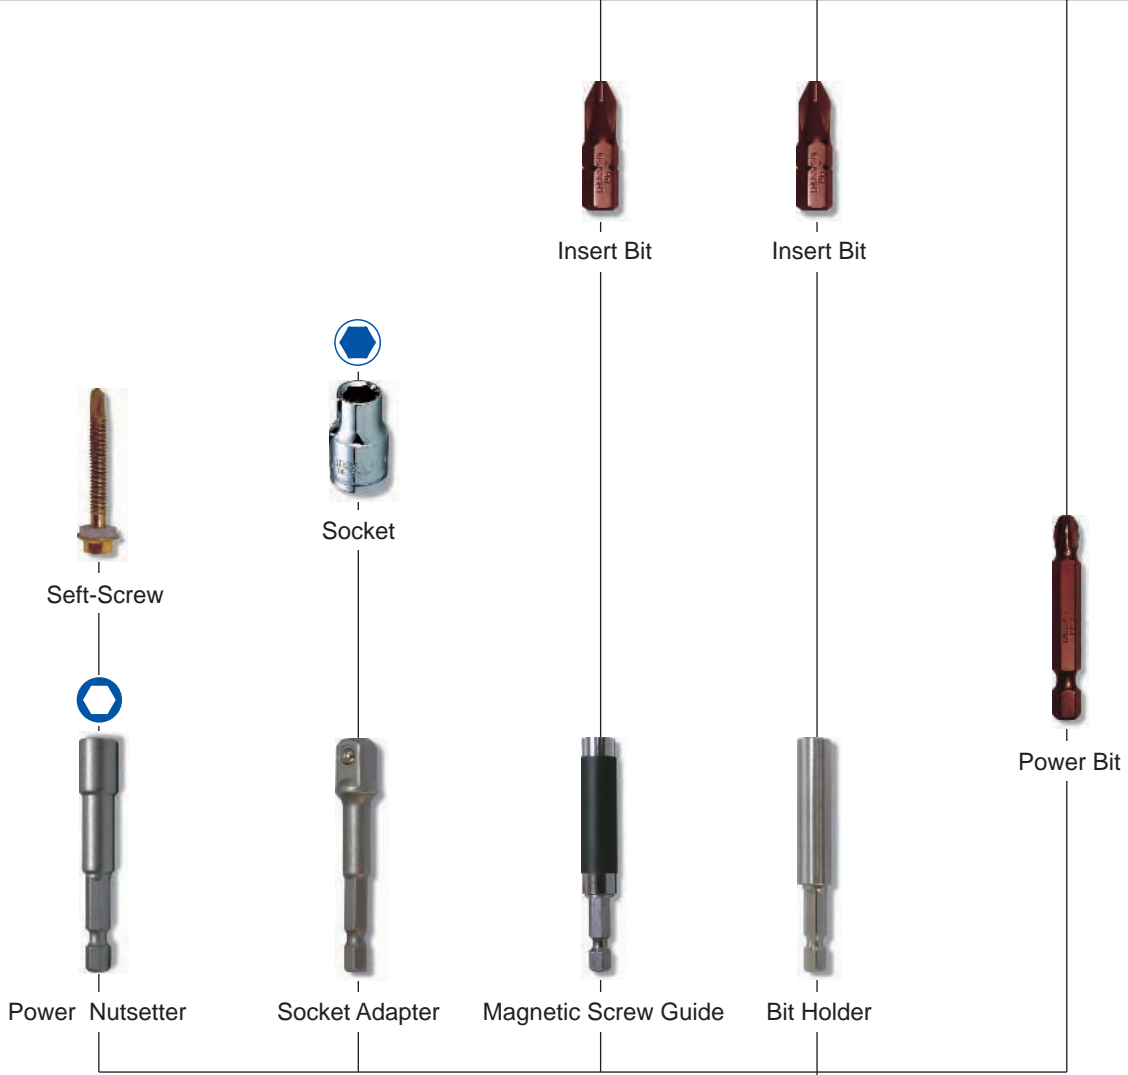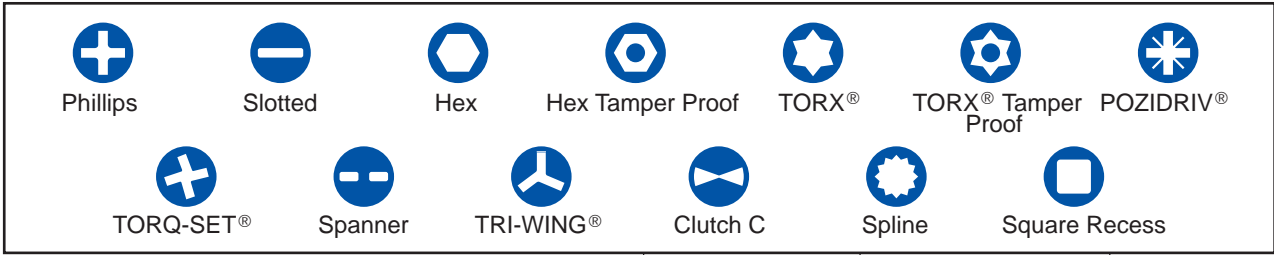

## Quick Lock Adapter

*Built For The Pro's®*

Fastener Drive Tool





**Power Nutsetters**

Description	Hex Drive	Shank Dia.	Overall Length		 kgs
-------------	-----------	------------	----------------	---	---



**Magnetic Power Nutsetters Bits (SAE) - 1/4" Hex x 45mm L**

48-502	1/4"	6.35mm(1/4")	45mm L	50/1000	0.9/19.0
48-504	5/16"	6.35mm(1/4")	45mm L	50/1000	1.0/20.0
48-506	3/8"	6.35mm(1/4")	45mm L	50/1000	1.2/24.0
48-507	7/16"	6.35mm(1/4")	45mm L	50/800	1.5/24.0
48-509	1/2"	6.35mm(1/4")	45mm L	30/480	0.9/15.0
48-510	9/16"	6.35mm(1/4")	45mm L	30/480	1.5/24.0



**Magnetic Power Nutsetters Bits (SAE) - 1/4" Hex x 65mm L**

48-522	1/4"	6.35mm(1/4")	65mm L	30/600	0.7/15.0
48-524	5/16"	6.35mm(1/4")	65mm L	30/600	0.8/17.0
48-526	3/8"	6.35mm(1/4")	65mm L	30/600	1.0/21.0
48-527	7/16"	6.35mm(1/4")	65mm L	30/360	1.4/17.0
48-529	1/2"	6.35mm(1/4")	65mm L	30/360	1.5/18.0
48-530	9/16"	6.35mm(1/4")	65mm L	30/360	1.7/22.0



**Magnetic Power Nutsetters Bits (Metric) - 1/4" Hex x 45mm L**

48-541	5.5mm	6.35mm(1/4")	45mm L	50/1000	0.9/18.0
48-542	6mm	6.35mm(1/4")	45mm L	50/1000	0.9/19.0
48-543	7mm	6.35mm(1/4")	45mm L	50/1000	0.9/19.0
48-544	8mm	6.35mm(1/4")	45mm L	50/1000	1.0/20.0
48-545	9mm	6.35mm(1/4")	45mm L	50/1000	1.0/22.0
48-546	10mm	6.35mm(1/4")	45mm L	50/1000	1.2/24.0
48-547	11mm	6.35mm(1/4")	45mm L	50/800	1.5/24.0
48-548	12mm	6.35mm(1/4")	45mm L	50/800	1.5/24.0
48-549	13mm	6.35mm(1/4")	45mm L	30/480	0.9/15.0
48-550	14mm	6.35mm(1/4")	45mm L	30/480	1.5/24.0



**Magnetic Power Nutsetters Bits (Metric) - 1/4" Hex x 65mm L**

48-561	5.5mm	6.35mm(1/4")	65mm L	30/600	0.7/15.0
48-562	6mm	6.35mm(1/4")	65mm L	30/600	0.7/15.0
48-563	7mm	6.35mm(1/4")	65mm L	30/600	0.7/15.0
48-564	8mm	6.35mm(1/4")	65mm L	30/600	0.8/17.0
48-565	9mm	6.35mm(1/4")	65mm L	30/600	1.0/20.0
48-566	10mm	6.35mm(1/4")	65mm L	30/600	1.0/21.0
48-567	11mm	6.35mm(1/4")	65mm L	30/360	1.4/17.0
48-568	12mm	6.35mm(1/4")	65mm L	30/360	1.4/17.0
48-569	13mm	6.35mm(1/4")	65mm L	30/360	1.5/18.0
48-570	14mm	6.35mm(1/4")	65mm L	30/360	1.7/22.0

**Square Drive Socket Adapters**



Description	Square Drive	Shank Dia.	Overall Length			kgs
<b>Ball-Lock Socket Adapters (SAE) - 1/4" Hex</b>						
48-581	1/4"	6.35mm(1/4")	25mm L	100/2000		1.0/20.0
48-582	1/4"	6.35mm(1/4")	50mm L	50/1000		0.8/17.0
48-583	1/4"	6.35mm(1/4")	65mm L	50/1000		1.0/21.0
48-585	3/8"	6.35mm(1/4")	50mm L	50/600		1.4/17.0
48-586	3/8"	6.35mm(1/4")	65mm L	50/600		1.6/20.0
48-587	3/8"	6.35mm(1/4")	75mm L	50/600		1.8/23.0
48-588	1/2"	6.35mm(1/4")	75mm L	25/500		1.0/21.0


**Quick Lock Chuck Adapters**



Description	Chuck Capacity	Overall Length			kgs
<b>Magnetic Float Adapters (SAE) - 1/4" Hex</b>					
48-911	1/4"	50mm L	50/600		1.5/19.0
48-912	1/4"	65mm L	25/400		1.0/17.0
48-913	1/4"	75mm L	25/400		1.2/21.0



<b>Pull-Lock Adapters (SAE) - 1/4" Hex</b>					
48-921	1/4"	50mm L	50/600		1.4/18.0
48-922	1/4"	65mm L	25/400		0.9/15.0
48-923	1/4"	75mm L	25/400		1.1/19.0



<b>Push-Lock Adapters (SAE) - 1/4" Hex</b>					
48-931	1/4"	50mm L	50/600		1.4/18.0
48-932	1/4"	65mm L	25/400		0.9/15.0
48-933	1/4"	75mm L	25/400		1.1/19.0

**Magnetic Bit Holders**



Description	Bit Drive	Overall Length			kgs
<b>One-Piece Stainless Steel Magnetic Bit Holder (SAE) - 1/4" Hex</b>					
48-941	1/4"	60mm L	50/600		1.2/16.0
48-942	1/4"	75mm L	50/600		1.7/21.0
48-943	1/4"	100mm L	30/300		1.7/18.0
48-944	1/4"	150mm L	20/200		1.9/20.0



<b>One-Piece Stainless Steel Magnetic Bit Holder (w/Ring) - 1/4" Hex</b>					
48-951	1/4"	60mm L	50/600		1.2/16.0
48-952	1/4"	75mm L	50/600		1.7/21.0



<b>Magnetic Screw Guide - 1/4" Hex</b>					
48-971	1/4"	80mm L	50/600		1.4/18.0
48-972	1/4"	120mm L	25/400		1.1/19.0





**Magnetic Bit Holders**

Description	Bit Drive	Overall Length			kgs
-------------	-----------	----------------	--	--	-----

**Magnetic Bit Holder (Stainless Steel Housing) - 1/4" Hex**

48-961	1/4"	60mm L	50/600		1.2/16.0
48-962	1/4"	75mm L	50/600		1.6/20.0
48-963	1/4"	100mm L	25/400		1.0/17.0
48-964	1/4"	150mm L	25/400		1.3/21.0
48-965	1/4"	175mm L	12/240		0.8/17.0
48-966	1/4"	200mm L	12/240		0.9/19.0

**Insert Bits - 25mm L**

Description	Pt. Size	Shank Dia.	Overall Length			kgs
-------------	----------	------------	----------------	--	--	-----

**Phillips Insert Bits - 1/4" Hex x 25mm L**

44-200	PH0	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-201	PH1	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-202	PH2	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-203	PH3	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-204	PH4	6.35mm(1/4")	25mm L	10/2000		0.08/17.0



Phillips

**Slotted Insert Bits (Metric) - 1/4" Hex x 25mm L**

44-213	3mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-214	4mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-215	4.5mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-216	5mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-217	5.5mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-218	6mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-219	6.5mm	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-220	7mm	6.35mm(1/4")	25mm L	10/2000		0.08/17.0
44-221	8mm	6.35mm(1/4")	25mm L	8/1600		0.09/18.0
44-222	10mm	6.35mm(1/4")	25mm L	8/1600		0.11/23.0



Slotted

**Hex Insert Bits (SAE) - 1/4" Hex x 25mm L**

44-231	1/16"	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-232	5/64"	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-233	3/32"	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-234	7/64"	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-235	1/8"	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-236	9/64"	6.35mm(1/4")	25mm L	10/2000		0.07/15.0
44-237	5/32"	6.35mm(1/4")	25mm L	10/2000		0.08/17.0
44-238	3/16"	6.35mm(1/4")	25mm L	10/2000		0.08/17.0
44-239	7/32"	6.35mm(1/4")	25mm L	10/2000		0.08/17.0
44-240	1/4"	6.35mm(1/4")	25mm L	10/2000		0.08/17.0
44-242	5/16"	6.35mm(1/4")	25mm L	8/1600		0.08/17.0
44-243	3/8"	6.35mm(1/4")	25mm L	8/1600		0.14/27.5



Hex

**Insert Bits - 25mm L**

Description	Pt. Size	Shank Dia.	Overall Length		 kgs
-------------	----------	------------	----------------	---	---

**Hex Insert Bits (Metric) - 1/4" Hex x 25mm L**

44-245	1.5mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-246	2mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-247	2.5mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-248	3mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-249	4mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-250	5mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-251	5.5mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-252	6mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-253	7mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-254	8mm	6.35mm(1/4")	25mm L	8/1600	0.08/17.0
44-255	10mm	6.35mm(1/4")	25mm L	8/1600	0.14/27.5



Hex

**Hex Tamper Proof Insert Bits (SAE) - 1/4" Hex x 25mm L**

44-271	1/16"	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-272	5/64"	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-273	3/32"	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-274	7/64"	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-275	1/8"	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-276	9/64"	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-277	5/32"	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-278	3/16"	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-279	7/32"	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-280	1/4"	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-281	5/16"	6.35mm(1/4")	25mm L	8/1600	0.08/17.0
44-282	3/8"	6.35mm(1/4")	25mm L	8/1600	0.14/27.5



Hex Tamper Proof

**Hex Tamper Proof Insert Bits (Metric) - 1/4" Hex x 25mm L**

44-285	1.5mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-286	2mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-287	2.5mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-288	3mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-289	4mm	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-290	5mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-291	5.5mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-292	6mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-293	7mm	6.35mm(1/4")	25mm L	10/2000	0.08/17.0
44-294	8mm	6.35mm(1/4")	25mm L	8/1600	0.08/17.0
44-295	10mm	6.35mm(1/4")	25mm L	8/1600	0.14/27.5



Hex Tamper Proof







**Insert Bits - 25mm L**

Description	Pt. Size	Shank Dia.	Overall Length		kgs
<b>TORX® Insert Bits - 1/4" Hex x 25mm Lx 25mm L</b>					
44-301	T-5	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-302	T-6	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-303	T-7	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-304	T-8	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-305	T-9	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-306	T-10	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-307	T-15	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-308	T-20	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-309	T-25	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-310	T-27	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-311	T-30	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-313	T-40	6.35mm(1/4")	25mm L	10/2000	0.06/13.0
44-314	T-45	6.35mm(1/4")	25mm L	8/1600	0.07/15.0
44-315	T-50	6.35mm(1/4")	25mm L	8/1600	0.08/17.0

<b>TORX® Tamper Proof Insert Bits - 1/4" Hex x 25mm L</b>					
44-321	T-5	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-322	T-6	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-323	T-7	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-324	T-8	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-325	T-9	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-326	T-10	6.35mm(1/4")	25mm L	10/2000	0.04/9.0
44-327	T-15	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-328	T-20	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-329	T-25	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-330	T-27	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-331	T-30	6.35mm(1/4")	25mm L	10/2000	0.05/11.0
44-333	T-40	6.35mm(1/4")	25mm L	10/2000	0.06/13.0
44-334	T-45	6.35mm(1/4")	25mm L	8/1600	0.07/15.0
44-335	T-50	6.35mm(1/4")	25mm L	8/1600	0.08/17.0

<b>POZIDRIV® Insert Bits - 1/4" Hex x 25mm L</b>					
44-340	PZ0	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-341	PZ1	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-342	PZ2	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-343	PZ3	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-344	PZ4	6.35mm(1/4")	25mm L	10/2000	0.08/17.0

**Insert Bits - 25mm L**

Description	Pt. Size	Shank Dia.	Overall Length		 kgs
-------------	----------	------------	----------------	---	---



**TORQ-SET® Insert Bits - 1/4" Hex x 25mm L**

44-351	TS-6	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-352	TS-8	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-353	TS-10	6.35mm(1/4")	25mm L	10/2000	0.08/17.0



**Spanner® Insert Bits - 1/4" Hex x 25mm L**

44-355	SP-4	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-356	SP-6	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-357	SP-8	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-358	SP-10	6.35mm(1/4")	25mm L	10/2000	0.07/15.0



**TRI-WING® Insert Bits - 1/4" Hex x 25mm L**

44-361	TW-1	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-362	TW-2	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-363	TW-3	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-364	TW-4	6.35mm(1/4")	25mm L	10/2000	0.07/15.0



**Square Recess Insert Bits - 1/4" Hex x 25mm L**

44-370	S0	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-371	S1	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-372	S2	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-373	S3	6.35mm(1/4")	25mm L	10/2000	0.07/15.0



**Clutch C Insert Bits (SAE) - 1/4" Hex x 25mm L**

44-381	C1(1/8")	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-382	C2(5/32")	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-383	C3(3/16")	6.35mm(1/4")	25mm L	10/2000	0.07/15.0



**Spline Insert Bits - 1/4" Hex x 25mm L**

44-385	M5	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-386	M6	6.35mm(1/4")	25mm L	10/2000	0.07/15.0
44-387	M8	6.35mm(1/4")	25mm L	10/2000	0.08/17.0





## Power Bits - 50mm L

Description	Pt. Size	Shank Dia.	Overall Length			kg
-------------	----------	------------	----------------	--	--	----

### Phillips Power Bits - 1/4" Hex x 50mm L

44-400	PH0	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-401	PH1	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-402	PH2	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-403	PH3	6.35mm(1/4")	50mm L	10/1000	0.16/17.0
44-404	PH4	6.35mm(1/4")	50mm L	10/1000	0.17/18.0



### Slotted Power Bits (Metric) - 1/4" Hex x 50mm L

44-413	3mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-414	4mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-415	4.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-416	5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-417	5.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-418	6mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-419	6.5mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-420	7mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-421	8mm	6.35mm(1/4")	50mm L	8/800	0.16/17.0
44-422	10mm	6.35mm(1/4")	50mm L	8/800	0.23/24.0

### Hex Power Bits (SAE) - 1/4" Hex x 50mm L

44-431	1/16"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-432	5/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-433	3/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-434	7/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-435	1/8"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-436	9/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-437	5/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-438	3/16"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-439	7/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-440	1/4"	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-441	9/32"	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-442	5/16"	6.35mm(1/4")	50mm L	8/800	0.16/17.7
44-443	3/8"	6.35mm(1/4")	50mm L	8/800	0.24/25.0

**Power Bits - 50mm L**

Description	Pt. Size	Shank Dia.	Overall Length		 kgs
-------------	----------	------------	----------------	---	---

**Hex Power Bits (Metric) - 1/4" Hex x 50mm L**

44-445	1.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-446	2mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-447	2.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-448	3mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-449	4mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-450	5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-451	5.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-452	6mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-453	7mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-454	8mm	6.35mm(1/4")	50mm L	8/800	0.16/17.7
44-455	10mm	6.35mm(1/4")	50mm L	8/800	0.24/25.0



Hex

**Hex Tamper Proof Power Bits (SAE) - 1/4" Hex x 50mm L**

44-471	1/16"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-472	5/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-473	3/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-474	7/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-475	1/8"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-476	9/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-477	5/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-478	3/16"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-479	7/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-480	1/4"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-481	9/32"	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-482	5/16"	6.35mm(1/4")	50mm L	8/800	0.16/16.7
44-483	3/8"	6.35mm(1/4")	50mm L	8/800	0.24/25.0



Hex Tamper Proof

**Hex Tamper Proof Power Bits (Metric) - 1/4" Hex x 50mm L**

44-485	1.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-486	2mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-487	2.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-488	3mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-489	4mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-490	5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-491	5.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-492	6mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-493	7mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-494	8mm	6.35mm(1/4")	50mm L	8/800	0.16/17.7
44-495	10mm	6.35mm(1/4")	50mm L	8/800	0.24/25.0



Hex Tamper Proof



## Power Bits - 50mm L

Description	Pt. Size	Shank Dia.	Overall Length		 kgs
-------------	----------	------------	----------------	---	---

### TORX<sup>®</sup> Power Bits - 1/4" Hex x 50mm L

44-506	T-10	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-507	T-15	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-508	T-20	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-509	T-25	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-510	T-27	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-511	T-30	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-513	T-40	6.35mm(1/4")	50mm L	10/1000	0.16/17.0
44-514	T-45	6.35mm(1/4")	50mm L	8/800	0.21/22.0
44-515	T-50	6.35mm(1/4")	50mm L	8/800	0.21/22.0



TORX<sup>®</sup>

### TORX<sup>®</sup> Tamper Proof Power Bits - 1/4" Hex x 50mm L


44-526	T-10	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-527	T-15	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-528	T-20	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-529	T-25	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-530	T-27	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-531	T-30	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-533	T-40	6.35mm(1/4")	50mm L	10/1000	0.16/17.0
44-534	T-45	6.35mm(1/4")	50mm L	8/800	0.21/22.0
44-535	T-50	6.35mm(1/4")	50mm L	8/800	0.21/22.0



TORX<sup>®</sup> Tamper Proof

### POZIDRIV<sup>®</sup> Power Bits - 1/4" Hex x 50mm L

44-540	PZ0	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-541	PZ1	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-542	PZ2	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-543	PZ3	6.35mm(1/4")	50mm L	10/1000	0.15/16.5
44-544	PZ4	6.35mm(1/4")	50mm L	10/1000	0.17/18.0



POZIDRIV<sup>®</sup>

### Square Recess Power Bits - 1/4" Hex x 50mm L

44-570	S0	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
44-571	S1	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
44-572	S2	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-573	S3	6.35mm(1/4")	50mm L	10/1000	0.16/17.0



Square Recess

## Power Bits - 50mm L

Description	Pt. Size	Shank Dia.	Overall Length		kgs
<b>Round Shank Phillips Power Bits - 1/4" Hex x 50mm L</b>					
44-600	PH0	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-601	PH1	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-602	PH2	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-603	PH3	6.35mm(1/4")	50mm L	10/1000	0.16/17.0
44-604	PH4	6.35mm(1/4")	50mm L	10/1000	0.17/18.0
<b>Round Shank Slotted Power Bits (Metric) - 1/4" Hex x 50mm L</b>					
44-613	3mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-614	4mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-615	4.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-616	5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-617	5.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-618	6mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-619	6.5mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-620	7mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-621	8mm	6.35mm(1/4")	50mm L	8/800	0.16/17.0
44-622	10mm	6.35mm(1/4")	50mm L	8/800	0.23/24.0
<b>Round Shank Hex Power Bits (SAE) - 1/4" Hex x 50mm L</b>					
44-631	1/16"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-632	5/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-633	3/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-634	7/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-635	1/8"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-636	9/64"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-637	5/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-638	3/16"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-639	7/32"	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-640	1/4"	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-641	9/32"	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-642	5/16"	6.35mm(1/4")	50mm L	8/800	0.16/17.7
44-643	3/8"	6.35mm(1/4")	50mm L	8/800	0.24/25.0
<b>Round Shank Hex Power Bits (Metric) - 1/4" Hex x 50mm L</b>					
44-645	1.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-646	2mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-647	2.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-648	3mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-649	4mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-650	5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-651	5.5mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-652	6mm	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-653	7mm	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-654	8mm	6.35mm(1/4")	50mm L	8/800	0.16/17.7
44-655	10mm	6.35mm(1/4")	50mm L	8/800	0.24/25.0





Please Note

Round Shank is available overall length from 2"(50mm) ~ 12"(300mm), If order more longer length please detail overall length.

Fastener Drive Tool



**Power Bits - 50mm L**

Description	Pt. Size	Shank Dia.	Overall Length		 kgs
-------------	----------	------------	----------------	---	---

**Round Shank TORX® Power Bits - 1/4" Hex x 50mm L**

44-706	T-10	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-707	T-15	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-708	T-20	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-709	T-25	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-710	T-27	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-711	T-30	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-713	T-40	6.35mm(1/4")	50mm L	10/1000	0.16/17.0
44-714	T-45	6.35mm(1/4")	50mm L	8/800	0.21/22.0
44-715	T-50	6.35mm(1/4")	50mm L	8/800	0.21/22.0



TORX®



**Round Shank TORX® Tamper Proof Power Bits - 1/4" Hex x 50mm L**

44-726	T-10	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-727	T-15	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-728	T-20	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-729	T-25	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-730	T-27	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-731	T-30	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-733	T-40	6.35mm(1/4")	50mm L	10/1000	0.16/17.0
44-734	T-45	6.35mm(1/4")	50mm L	8/800	0.21/22.0
44-735	T-50	6.35mm(1/4")	50mm L	8/800	0.21/22.0



TORX® Tamper Proof



**Round Shank POZIDRIV® Power Bits - 1/4" Hex x 50mm L**

44-740	PZ0	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-741	PZ1	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-742	PZ2	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-743	PZ3	6.35mm(1/4")	50mm L	10/1000	0.15/16.5
44-744	PZ4	6.35mm(1/4")	50mm L	10/1000	0.17/18.0



POZIDRIV®



**Round Shank Square Recess Power Bits - 1/4" Hex x 50mm L**

44-770	S0	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-771	S1	6.35mm(1/4")	50mm L	10/1000	0.14/15.5
44-772	S2	6.35mm(1/4")	50mm L	10/1000	0.15/16.0
44-773	S3	6.35mm(1/4")	50mm L	10/1000	0.16/17.0



Square Recess



Round Shank is available overall length from 2"(50mm) ~ 12"(300mm), If order more longer length please detail overall length.

## Double End Bits

Description	Pt. Size	Shank Dia.	Overall Length		 kgs
<b>Phillips Double End Bits- 1/4" Hex</b>					
48-649	PH1	6.35mm(1/4")	45mm L	10/1500	0.09/14.5
48-650	PH2	6.35mm(1/4")	45mm L	10/1500	0.09/14.5
48-648	PH1	6.35mm(1/4")	65mm L	10/1500	0.15/16.0
48-651	PH2	6.35mm(1/4")	65mm L	10/1000	0.15/16.0
48-652	PH3	6.35mm(1/4")	65mm L	10/1000	0.15/16.0
48-659	PH2	6.35mm(1/4")	110mm L	10/500	0.27/14.5
48-653	PH3	6.35mm(1/4")	110mm L	10/500	0.27/14.5
48-660	PH2	6.35mm(1/4")	150mm L	10/500	0.37/19.0
48-655	PH3	6.35mm(1/4")	150mm L	10/500	0.37/19.0
48-661	PH2	6.35mm(1/4")	200mm L	10/300	0.50/16.5
48-654	PH3	6.35mm(1/4")	200mm L	10/300	0.50/16.5
48-656	PH2	6.35mm(1/4")	250mm L	10/300	0.70/20.5
48-657	PH3	6.35mm(1/4")	250mm L	10/300	0.70/20.5
48-662	PH2	6.35mm(1/4")	300mm L	10/200	0.80/16.5
48-665	PH3	6.35mm(1/4")	300mm L	10/200	0.80/16.5




## Impact Driver Bits


<b>Phillips Impact Driver Bits - 5/16" Hex x 36mm L</b>					
48-361	PH1	8mm(5/16")	36mm L	10/1000	0.15/16.0
48-362	PH2	8mm(5/16")	36mm L	10/1000	0.15/16.0
48-363	PH3	8mm(5/16")	36mm L	10/1000	0.15/16.0
48-364	PH4	8mm(5/16")	36mm L	10/1000	0.15/16.0




<b>Slotted Impact Driver Bits - 5/16" Hex x 36mm L</b>					
48-368	8mm	8mm(5/16")	36mm L	10/1000	0.14/14.5
48-370	10mm	8mm(5/16")	36mm L	10/1000	0.20/20.0
48-371	12mm	8mm(5/16")	36mm L	10/1000	0.30/14.5



<b>Phillips Impact Driver Bits - 5/16" Hex x 80mm L</b>					
48-801	PH1	8mm(5/16")	80mm L	10/500	0.35/18.0
48-802	PH2	8mm(5/16")	80mm L	10/500	0.35/18.0
48-803	PH3	8mm(5/16")	80mm L	10/500	0.35/18.0
48-804	PH4	8mm(5/16")	80mm L	10/500	0.35/18.0



<b>Slotted Impact Driver Bits - 5/16" Hex x 80mm L</b>					
48-808	8mm	8mm(5/16")	80mm L	10/500	0.35/18.0
48-810	10mm	8mm(5/16")	80mm L	10/500	0.45/23.0

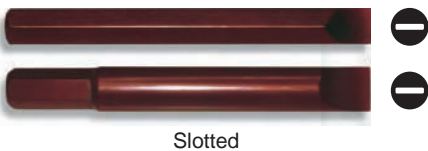



**Power Driver Bits**

Description	Pt. Size	Shank Dia.	Overall Length		kgs
-------------	----------	------------	----------------	--	-----

**ACR® Phillips Power Driver Bit - Non Slip Pattern - 1/4" Hex x 25mm L**



Phillips Type

49-100	PH0	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-101	PH1	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-102	PH2	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-103	PH3	6.35mm(1/4")	25mm L	10/2000	0.05/10.5

**Slotted Power Driver Bit - Non Slip Pattern - 1/4" Hex x 25mm L**



Slotted


49-104	3mm	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-105	4mm	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-106	5mm	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-107	6mm	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-109	7mm	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-108	8mm	6.35mm(1/4")	25mm L	10/2000	0.05/10.5



POZIDRIV®

**POZIDRIV® Power Driver Bit - Non Slip Pattern - 1/4" Hex x 25mm L**


49-124	PZ0	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-125	PZ1	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-126	PZ2	6.35mm(1/4")	25mm L	10/2000	0.05/10.5
49-127	PZ3	6.35mm(1/4")	25mm L	10/2000	0.05/10.5



Phillips

**ACR® Phillips Power Driver Bit - Non Slip Pattern - 1/4" Hex x 50mm L**


49-160	PH0	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-161	PH1	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-162	PH2	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-163	PH3	6.35mm(1/4")	50mm L	10/1000	0.14/14.5



Slotted

**Slotted Power Driver Bit - Non Slip Pattern - 1/4" Hex x 50mm L**

49-164	3mm	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-165	4mm	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-166	5mm	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-167	6mm	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-169	7mm	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-168	8mm	6.35mm(1/4")	50mm L	10/1000	0.14/14.5



POZIDRIV®

**POZIDRIV® Power Driver Bit - Non Slip Pattern - 50mm L**

49-184	PZ0	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-185	PZ1	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-186	PZ2	6.35mm(1/4")	50mm L	10/1000	0.14/14.5
49-187	PZ3	6.35mm(1/4")	50mm L	10/1000	0.14/14.5

**Fastener Drive Tool Sets**



Description   kgs

**5Pcs. Professional Impact Driver Set With Bits - Red Blow Mold Box**

**48-105** 1/20 1.0/20.0

- 1Pc. Impact Driver Handle.
- 4Pcs. Impact Drive Bit : 8mm(5/16") Hex x 36mmL
  - ⊕ Phillips : PH2, PH3.
  - ⊖ Slotted : 8mm, 10mm.

**5Pcs. Impact Driver Set With Bits - Blow Mold Box**

**48-005** 1/25 0.9/22.8

- 1Pc. Impact Driver Handle.
- 4Pcs. Impact Drive Bit : 8mm(5/16") Hex x 36mmL
  - ⊕ Phillips : PH2, PH3.
  - ⊖ Slotted : 8mm, 10mm.

**14Pcs. Impact Driver Set With Bits - Blow Mold Box**

**48-014** 1/20 1.3/24.8

- 1Pc. Impact Driver Handle.
- 12Pcs. Impact Drive Bit : 8mm(5/16") Hex x 36mmL
  - ⊕ Phillips : PH1, PH2, PH3, PH4.
  - Hex : 4mm, 5mm, 6mm, 8mm.
  - ⊖ Slotted : 6mm, 8mm, 10mm, 12mm.
- 1Pc. ○ 3/8"Dr. Ball- Lock Socket Adapter : 3/8" Hex x 30mmL.

**7Pcs. Electronic Screw-Drive Set - 12 in 1**

**48-112** 1/40 0.4/18.0

- 1Pc. Duplex Color Handle With Fast.
- 6Pcs. 120mm Adjustable, Reversible & Interchangeable Blades.
  - ⊕ Phillips : PH00, PH0, PH1.
  - ⊖ Slotted : 2mm, 3mm, 4mm.
  - ⊗ TORX® Tamper proof : T5, T6, T8, T10, T15, T20.

**40Pcs. Air Impact Driver Bit Set - Red Blow Mold Box**

**48-040** 1/10 1.8/19.0

- 2Pcs. Air Bit Holder : 3/8"Dr. x H10 & 1/2"Dr. x H10.
- 19Pcs. Insert Bit : 10mm(3/8") Hex x 75mmL
  - Hex : 4, 5, 6, 7, 8, 10, 12 mm.
  - Spline : M5, M6, M8, M10, M12.
  - ⊗ TORX® Tamper Proof : T20, T25, T30, T40, T45, T50, T55.
- 19Pcs. Insert Bit : 10mm(3/8") Hex x 30mmL
  - Hex : 4, 5, 6, 7, 8, 10, 12 mm.
  - Spline : M5, M6, M8, M10, M12.
  - ⊗ TORX® Tamper Proof : T20, T25, T30, T40, T45, T50, T55.



**Fastener Drive Tool Sets**

Description		 kgs
-------------	---	---

<b>1/4" Drive Socket &amp; Bit Set - 61Pcs. - Red Blow Mold Box</b>		
<b>87-011</b>	1/12	1.2/15.0



- 1Pc. Flexible Ratchet Screwdriver Handle.
- 1Pc. Adapter : 1/4"Hex x 25mmL.
- 1Pc. Bit Holder : 1/4"Hex x 60mmL.
- 1Pc. 3" Extension.
- 12Pcs. Socket : (Metric Size 6-Point)  
4, 4.5, .5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm.
- 10Pcs. Socket : (SAE Size 6-Point)  
5/32", 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2".
- 35Pcs. Insert Bit : (1/4"Hex x 25mmL)
  - ⊖ Slotted Type : 3, 4, 5, 6, 7 mm.
  - ⊕ Phillips Type : PH0, PH1, PH2, PH2, PH3.
  - ⊕ POZIDRIV® Type : PZ0, PZ1, PZ2, PZ2, PZ3.
  - Hex Type : 1.5, 2, 2.5, 3, 4, 5, 5.5, 6 mm.
  - ⊕ TORX® Tamper Proof Type : T5, T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40.

<b>100Pcs. Screwdriver Bit Set - Red Blow Mold Case</b>		
<b>99-061</b>	1/20	0.8/16.0



- 1Pc. Magnetic Bit Holder : 1/4" Hex x 60mmL.
- 2Pcs. Adapter : 1/4" Hex x 25mmL & 1/4" Hex x 50mmL.
- 1Pc. Bit Adapter : 1/4"Dr. - 1/4" Hex.
- 1Pc. "Y" Type Spanner
- 95Pcs. Insert Bit : 1/4" Hex x 25mmL
  - ⊕ Phillips : PH0, PH1, PH2, PH2, PH2, PH2, PH2, PH3.
  - ⊕ POZIDRIV® : PZ0, PZ1, PZ2, PZ2, PZ2, PZ2, PZ2, PZ3.
  - ⊖ Slotted : 3, 4, 4.5, 5, 5.5, 6, 6.5, 7, 8 mm.
  - ⊕ TORX® : T8, T10, T15, T20, T25, T27, T30, T40, T45.
  - ⊕ TORX® Tamper Proof : T8, T10, T15, T20, T25, T27, T30, T35, T40.
  - Hex : 1.5, 2, 2.5, 3, 4, 5, 5.5, 6, 8 mm.
  - Hex : 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4".
  - ⊕ Hex Tamper Proof : 2, 2.5, 3, 4, 5, 6 mm.
  - ⊕ Hex Tamper Proof : 5/64", 3/32", 7/64", 1/8", 9/64", 5/32".
  - ⊕ Spanner : SP4, SP6, SP8, SP10.
  - ⊕ TRI-WING® : TW1, TW2, TW3, TW4.
  - ⊕ TORQ-SET® : TS6, TS8, TS10.
  - Square Recess : S0, S1, S2, S3.
  - Spline : M5, M6, M8.
  - ⊖ Clutch C : C1, C2, C3.



## Fastener Drive Tool Sets

Description



kg

### 31Pcs. Screwdriver Bit Set

44-001

6/36

2.28/14.6



- 1Pc. Screwdriver Bit Holder.
- 29Pcs. Insert Bit : 1/4" Hex x 25mmL
  - ⊕ POZIDRIV® : PZ0, PZ1, PZ2, PZ3.
  - ⊕ Phillips : PH0, PH1, PH2, PH2, PH3.
  - Hex : 2, 3, 4, 5, 6 mm.
  - ⊖ Slotted : 3, 4, 5, 6, 7 mm.
  - ⊕ TORX® : T6, T8, T10, T15, T20, T25, T27, T30, T40.
- 1Pc. ○ Ball- Lock Socket Adapter : 1/4" Hex x 25mmL.

### 31Pcs. Screwdriver Bit Set

44-002

6/36

2.28/14.6



- 1Pc. Screwdriver Bit Holder.
- 29Pcs. Insert Bit : 1/4" Hex x 25mmL
  - ⊙ Spline : M5, M6, M8.
  - ⊕ TORQ-SET® : TS6, TS8, TS10.
  - ⊕ TRI-WING® : TW1, TW2, TW3, TW4.
  - ⊙ Hex Tamper Proof : 2, 2.5, 3, 4, 5, 6 mm.
  - ⊖ Spanner : SP4, SP6, SP8, SP10.
  - ⊕ TORX® Tamper Proof : T6, T8, T10, T15, T20, T25, T27, T30, T40.
- 1Pc. ○ Ball- Lock Socket Adapter : 1/4" Hex x 25mmL.



Hex Key Wrenches

Description	Size				 kgs
-------------	------	--	---	---	---

Hex Key Wrenches - Standard Length (Metric)

66-104	1.5	14	45	200/2000	0.2/3.0
66-105	2.0	16	50	200/2000	0.4/5.0
66-106	2.5	18	56	150/1500	0.5/5.5
66-107	3.0	20	63	100/1000	0.5/6.0
66-108	4.0	25	70	50/500	0.5/6.0
66-110	5.0	28	80	40/400	0.7/8.2
66-112	6.0	32	90	25/250	0.8/8.5
66-114	8.0	36	100	20/200	1.2/13.0
66-116	10.0	40	112	12/120	1.6/16.6
66-117	12.0	45	125	10/60	1.6/11.0
66-118	14.0	56	140	8/48	1.6/10.6
66-119	17.0	65	160	4/24	1.6/10.6
66-120	19.0	70	180	4/24	2.4/15.4



Hex Key Wrenches - Standard Length (SAE)

66-131	1/16	14	45	200/2000	0.2/3.0
66-132	5/64	16	50	200/2000	0.4/5.0
66-133	3/32	18	56	150/1500	0.5/5.5
66-135	1/8	20	63	100/1000	0.5/6.0
66-137	5/32	25	70	50/500	0.5/6.0
66-138	3/16	28	80	40/400	0.7/8.2
66-140	1/4	32	90	25/250	0.8/8.5
66-141	5/16	36	100	20/200	1.2/13.0
66-142	3/8	40	108	12/120	1.6/16.6

Hex Key Wrenches



Description	Size				 kgs
-------------	------	--	---	---	---

Hex Key Wrenches - Long Length (Metric)

66-204	1.5	14	77	200/2000	1.0/11.0
66-205	2.0	16	83	200/2000	1.2/13.0
66-206	2.5	18	90	150/1500	1.7/17.5
66-207	3.0	20	98	100/1000	1.3/13.5
66-208	4.0	25	106	50/500	1.1/11.5
66-210	5.0	28	118	40/400	1.0/11.0
66-212	6.0	32	137	25/250	1.0/11.0
66-214	8.0	36	156	20/200	1.6/17.0
66-216	10.0	40	170	12/120	1.6/17.0
66-217	12.0	45	207	10/60	2.4/15.5
66-218	14.0	56	230	8/48	3.0/18.8
66-219	17.0	65	250	4/24	2.4/15.4
66-220	19.0	70	280	4/24	3.2/20.2

Hex Key Wrenches - Long Length (SAE)

66-231	1/16	14	77	200/2000	1.0/11.0
66-232	5/64	16	82	200/2000	1.2/13.0
66-233	3/32	18	88	150/1500	1.7/17.5
66-235	1/8	20	96	100/1000	1.3/13.5
66-237	5/32	25	105	50/500	1.1/11.5
66-238	3/16	28	114	40/400	1.0/11.0
66-240	1/4	32	135	25/250	1.0/11.0
66-241	5/16	36	156	20/200	1.6/17.0
66-242	3/8	40	170	12/200	1.6/17.0





Hex Key Wrenches

**Hex Key Wrenches**

Description	Size				 kgs
-------------	------	--	---	---	---

Hex Key Wrenches - Extra Long Length (Metric)					
66-301	1.5	14	90	200/2000	1.2/13.0
66-302	2.0	16	100	200/2000	1.3/14.0
66-303	2.5	18	112	150/1500	2.0/21.0
66-304	3.0	20	126	100/1000	1.5/16.0
66-305	4.0	25	140	50/500	1.4/15.0
66-306	5.0	28	160	40/400	1.3/14.0
66-308	6.0	32	180	25/250	1.3/14.0
66-310	8.0	36	200	20/200	2.0/21.0
66-311	10.0	40	224	12/120	2.2/22.6
66-312	12.0	45	250	10/60	2.8/18.8
66-313	14.0	56	280	8/48	3.8/23.8
66-314	17.0	63	320	4/24	3.0/19.0
66-315	19.0	70	360	4/24	4.0/25.0

Hex Key Wrenches - Extra Long Length (SAE)					
66-331	1/16	14	90	200/2000	1.2/13.0
66-332	5/64	16	100	200/2000	1.3/14.0
66-333	3/32	18	112	150/1500	2.0/21.0
66-334	1/8	20	126	100/1000	1.5/16.0
66-335	5/32	25	140	50/500	1.4/15.0
66-336	3/16	28	160	40/400	1.3/14.0
66-338	1/4	32	180	25/250	1.3/14.0
66-339	5/16	36	200	20/200	2.0/21.0
66-340	3/8	40	224	12/120	2.2/22.6
66-341	7/16	42	235	10/100	2.8/18.8
66-342	1/2	45	250	10/60	3.6/22.6
66-343	9/16	56	280	5/30	3.8/23.8
66-344	5/8	63	320	5/30	3.0/19.0
66-345	3/4	70	360	4/24	4.0/25.0

**Ball-Speed® Hex Key Wrenches**



Description	Size				 kgs
-------------	------	--	---	---	---

**Ball-Speed® Hex Key Wrenches - Long Length (Metric)**

66-404	1.5	14	77	200/2000	1.0/11.0
66-405	2.0	16	83	200/2000	1.2/13.0
66-406	2.5	18	90	150/1500	1.7/17.5
66-407	3.0	20	98	100/1000	1.3/13.5
66-408	4.0	25	106	50/500	1.1/11.5
66-410	5.0	28	118	40/400	1.0/11.0
66-412	6.0	32	137	25/250	1.0/11.0
66-414	8.0	36	156	20/200	1.6/17.0
66-416	10.0	40	170	12/120	1.6/17.0




**Ball-Speed® Hex Key Wrenches - Long Length (SAE)**

66-431	1/16	14	77	200/2000	1.0/11.0
66-432	5/64	16	82	200/2000	1.2/13.0
66-433	3/32	18	88	150/1500	1.7/17.5
66-435	1/8	20	96	100/1000	1.3/13.5
66-437	5/32	25	105	50/500	1.1/11.5
66-438	3/16	28	114	40/400	1.0/11.0
66-440	1/4	32	135	25/250	1.0/11.0
66-441	5/16	36	156	20/200	1.6/17.0
66-442	3/8	40	170	12/200	1.6/17.0





**Ball-Speed® Hex Key Wrenches**

Description	Size				 kgs
-------------	------	--	---	---	---

Ball-Speed® Hex Key Wrenches - Extra Long Length (Metric)					
66-501	1.5	14	90	200/2000	1.2/13.0
66-502	2.0	16	100	200/2000	1.3/14.0
66-503	2.5	18	112	150/1500	2.0/21.0
66-504	3.0	20	126	100/1000	1.5/16.0
66-505	4.0	25	140	50/500	1.4/15.0
66-506	5.0	28	160	40/400	1.3/14.0
66-508	6.0	32	180	25/250	1.3/14.0
66-510	8.0	36	200	20/200	2.0/21.0
66-511	10.0	40	224	12/120	2.2/22.6

Ball-Speed® Hex Key Wrenches - Extra Long Length (SAE)					
66-531	1/16	14	90	200/2000	1.2/13.0
66-532	5/64	16	100	200/2000	1.3/14.0
66-533	3/32	18	112	150/1500	2.0/21.0
66-534	1/8	20	126	100/1000	1.5/16.0
66-535	5/32	25	140	50/500	1.4/15.0
66-536	3/16	28	160	40/400	1.3/14.0
66-538	1/4	32	180	25/250	1.3/14.0
66-539	5/16	36	200	20/200	2.0/21.0
66-540	3/8	40	224	12/120	2.2/22.6



**TORX® Tamper Proof Key Wrenches**

Description	Size				 kgs
-------------	------	---	---	---	---

**TORX® Tamper Proof Key Wrenches - Long Length**

66-601	T10	14	77	200/2000	1.0/11.0
66-602	T15	16	83	200/2000	1.2/13.0
66-603	T20	18	90	150/1500	1.7/17.5
66-604	T25	20	98	100/1000	1.3/13.5
66-605	T27	25	106	50/500	1.1/11.5
66-606	T30	28	118	40/400	1.0/11.0
66-607	T40	32	137	25/250	1.0/11.0
66-608	T45	36	156	20/200	1.6/17.0
66-609	T50	40	170	12/120	1.6/17.0

**TORX® Tamper Proof Key Wrenches - Extra Long Length**




66-631	T10	14	90	200/2000	1.2/13.0
66-632	T15	16	100	200/2000	1.3/14.0
66-633	T20	18	112	150/1500	2.0/21.0
66-634	T25	20	126	100/1000	1.5/16.0
66-635	T27	25	140	50/500	1.4/15.0
66-636	T30	28	160	40/400	1.3/14.0
66-637	T40	32	180	25/250	1.3/14.0
66-638	T45	36	200	20/200	2.0/21.0
66-639	T50	40	224	12/120	2.2/22.6

**"T" Handle Hex Key Wrenches (Metric)**

66-701	2.5	50/500	0.9/10.0
66-702	3	50/500	1.1/12.0
66-703	4	25/250	1.1/12.0
66-704	5	25/250	1.5/15.5
66-705	6	25/250	2.0/21.0
66-706	8	12/120	2.0/20.5
66-707	10	12/72	3.0/19.0

**"T" Handle TORX® Hex Key Wrenches**

66-803	T20	50/500	2.2/23.0
66-804	T25	25/250	1.4/15.0
66-806	T30	25/250	1.9/20.0
66-807	T40	12/120	1.7/18.0
66-808	T45	12/120	1.8/19.0
66-809	T50	12/72	2.7/17.0
66-810	T55	12/72	3.0/19.0



## Hex Key Wrench Sets

Description



kg

### 9Pcs. Hex Key Wrench Set - (Metric) - Standard Length

66-091

6/48

1.9/16.0

○ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

### 9Pcs. Hex Key Wrench Set - (SAE) - Standard Length

66-191

6/48

1.9/16.0

○ 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"

### 9Pcs. Hex Key Wrench Set - (Metric) - Long Length

66-092

6/48

2.5/20.5

○ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

### 9Pcs. Hex Key Wrench Set - (SAE) - Long Length

66-192

6/48

2.5/20.5

○ 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"

### 9Pcs. Hex Key Wrench Set - (Metric) - Extra Long Length

66-093

6/48

3.1/26.0

○ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

### 9Pcs. Hex Key Wrench Set - (SAE) - Extra Long Length

66-193

6/48

3.1/26.0

○ 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"

## Ball-Speed® Hex Key Wrench Set

### 9Pcs. Ball-Speed® Hex Key Wrench Set - (Metric) - Long Length

66-098

6/48

2.5/20.5

○ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

### 9Pcs. Ball-Speed® Hex Key Wrench Set - (SAE) - Long Length


66-198



6/48


2.5/20.5

○ 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"

**Ball-Speed® Hex Key Wrench Sets**



Description		 kgs
<b>9Pcs. Ball-Speed® Hex Key Wrench Set - (Metric) - Extra Long Length</b>		
66-099	6/48	3.1/26.0
⊙ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		




<b>9Pcs. Ball-Speed® Hex Key Wrench Set - (SAE) - Extra Long Length</b>		
66-199	6/48	3.1/26.0
⊙ 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"		



<b>9Pcs. Ball-Speed® Hex Key Wrench Set 3-Way Duplex Grip Holder - (Metric) - Extra Long Length</b>		
66-399	6/36	3.2/21.0
⊙ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		



<b>9Pcs. Ball-Speed® Hex Key Wrench Set 3-Way Duplex Grip Holder - (SAE) - Extra Long Length</b>		
66-499	6/36	3.2/21.0
⊙ 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"		



**TORX® Tamper Proof Key Wrench Sets**

<b>9Pcs. TORX® Tamper Proof Key Wrench Set - Long Length</b>		
66-095	6/48	2.5/20.5
⊕ T10, T15, T20, T25, T27, T30, T40, T45, T50		





<b>9Pcs. TORX® Tamper Proof Key Wrench Set - Extra Long Length</b>		
66-096	6/48	3.1/26.0
⊕ T10, T15, T20, T25, T27, T30, T40, T45, T50		

Hex Key Wrenches





**Fold up Wrench Sets**

Description		 kgs
<b>10Pcs. Fold up TORX® Tamper Proof Key Wrench Set</b>		
66-599	12/96	1.8/16.0
⊕ T6, T7, T8, T9, T10, T15, T20, T25, T27, T30		

<b>8Pcs. Fold up Hex Key Wrench Set</b>		
66-699	12/96	1.7/15.0
○ Hex : 1.5, 2, 2.5, 3, 4, 5, 6 mm.		
● Slotted : 6 mm.		
⊕ Phillips : PH2.		

**Hex Key Wrench Sets**

<b>7Pcs. "T" Handle Hex Key Wrench Set - (Metric)</b>		
66-799	1/12	1.2/15.0
○ 2.5, 3, 4, 5, 6, 8, 10 mm		

<b>7Pcs. "T" Handle TORX® Key Wrench Set - (Metric)</b>		
66-899	1/12	1.5/19.0
⊕ T20, T25, T30, T40, T45, T50, T55		

<b>22Pcs. Combination Key Wrench Set</b>		
66-999	1/8	2.5/20.0
● 4Pcs. Hex Key Wrenches - (Metric) - Extra Long Length		
○ 12, 14, 17, 19 mm		
● 9Pcs. Ball-Speed® Hex Key Wrenches - (Metric) - Extra Long Length		
○ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm		
● 9Pcs. TORX® Tamper Proof Key Wrenches - Extra Long Length		
⊕ T10, T15, T20, T25, T27, T30, T40, T45, T50		

